

i-290

Choose the Future. Now.

New Heat Pumps Range
with Gas R290



MXN

DISTRIBUTION AUSTRALIA
ANVIRO ENERTECH


i-290


New Heat Pumps Range with R290 gas

The widest in the market!

 A unique solution for heating, cooling and hot water production with assured performance all year round.



 Sustainability, technology and reliability combined with an incomparable **Made in Italy** style.

 MAXA's i-290 heat pumps are designed to generate **extremely high water temperatures** even in the harshest conditions.



 The range is distinguished by a **unique design** that integrates advanced technical solutions and modern aesthetics. With elegant lines and **state-of-the-art functionality**, it combines energy efficiency with distinctive style, representing excellence in heating and cooling.




MAXXI

DISTRIBUTION AUSTRALIA

ANVIRO ENERTECH

DESIGNED, REALIZED, GUARANTEED IN ITALY

 The **i-290 range** is available in **9 sizes**, with power outputs between **6 kW** and **27 kW** in heating mode.

Finally, the right heat pump solution for every system.

The i-290 range can be **perfectly and quickly integrated** both in new buildings and in combination with existing systems.

This makes it possible to satisfy with great efficiency both radiant floor systems, as well as traditional systems that exploit high-temperature water.

Environmental Sustainability

Thanks to the R290 technology, your system operates without the use of any fuel gas, ensuring efficient and sustainable operation **without any CO2 emissions** into the environment.

Unique and suitable for every need

Numerous accessories and fittings allow the individual heat pump to be customised.

**LIVE
BETTER**

 **A+++
energy class**

 **GWP 3**



Technical Data

i-290		O106	O109	O112	O115	O118	O121	O123	O125	O127
Cooling										
Cooling capacity (1)	kW	5,8* / 5,4	9,2* / 8,6	11,2* / 10,7	13,5* / 12,4	14,3* / 13,8	17,4	18,9	19,8	22,3
Power input (1)	kW	2,0	2,8	3,8	3,7	4,3	5,26	5,89	6,19	7,19
E.E.R. (1)	W/W	2,8	3,1	2,6	3,4	3,2	3,31	3,21	3,20	3,10
Cooling capacity (2)	kW	6,2* / 5,62	9,9* / 9,15	13,3* / 12,57	14,4* / 12,90	14,8* / 13,94	19,6	21,0	25,3	27,9
Power input (2)	kW	1,25	1,93	2,83	2,40	2,69	4,02	4,38	5,32	6,43
E.E.R. (2)	W/W	4,49	4,74	4,44	5,37	5,18	4,88	4,79	4,76	4,34
SEER (5)	W/W	4,8	5,4	4,7	5,0	5,0	5,27	5,27	4,94	4,84
Water flow rate (1)	L/s	0,3	0,4	0,5	0,6	0,7	0,83	0,90	0,95	1,07
Useful head (1)	kPa	66	57	81	80	74	128	121	128	117
Heating										
Heating capacity (3)	kW	6,9* / 6,24	10,4* / 9,69	13,7* / 12,60	17,7* / 16,33	19,84* / 18,72	21,0	22,8	24,8	27,0
Power input (3)	kW	1,31	2,05	2,61	3,30	4,05	4,31	4,78	5,37	6,21
C.O.P. (3)	W/W	4,76	4,72	4,83	4,94	4,62	4,87	4,77	4,62	4,35
Heating capacity (4)	kW	6,4* / 6,0	9,75* / 9,1	12,77* / 11,6	17,69* / 15,2	18,7* / 17,4	19,6	21,6	23,2	26,3
Power input (4)	kW	1,9	2,9	3,6	4,5	5,3	6,13	6,79	7,66	8,74
C.O.P. (4)	W/W	3,1	3,2	3,2	3,4	3,3	3,20	3,18	3,03	3,01
Heating capacity (11)	kW	6,41* / 5,9	9,81* / 9,1	13,08* / 12,0	16,64* / 14,7	17,7* / 16,7	19,7	21,2	24,1	25,8
Power input (11)	kW	2,3	3,4	4,6	5,2	6,0	7,38	7,97	9,56	10,3
C.O.P. (11)	W/W	2,6	2,7	2,6	2,8	2,8	2,67	2,66	2,52	2,50
SCOP (6)	W/W	4,7	5,2	4,9	4,9	4,8	4,75	4,72	4,49	4,46
Water flow rate (3)	L/s	0,3	0,4	0,6	0,8	0,9	0,59	0,65	0,69	0,79
Useful head (3)	kPa	63	52	79	68	60	150	146	149	142
Energy efficiency (Water 35°C-65°C)		A+++ / A++	A+++ / A+++	A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++
Compressor										
Type		Twin Rotary DC Inverter	Twin Rotary DC Inverter	Twin Rotary DC Inverter	Twin Rotary DC Inverter	Twin Rotary DC Inverter	Scroll DC Inverter	Scroll DC Inverter	Scroll DC Inverter	Scroll DC Inverter
Compressors	n°	1	1	1	1	1	1	1	1	1
Refrigerant circuits	n°	1	1	1	1	1	1	1	1	1
Refrigerant quantity (7)	kg	0,43	0,75	1,00	1,27	1,27	1,7	1,7	2,1	2,1
Hydraulic circuit										
Plumbing fittings	inch	G1"	G1"	G1"	G1"	G1"	1" 1/4 M	1" 1/4 M	1" 1/4 M	1" 1/4 M
Minimum water volume (8)	L	100	140	185	230	230	175	175	220	225
Noise level										
Sound power (9)	dB(A)	57	58	59	62	62	64	64	65	65
Sound pressure at 1m distance (10)	dB(A)	42	43	44	47	47	48	48	49	49
Electrical data										
Power supply		230V/1/50Hz			400V/3/50Hz		400V/3P+N+T/50Hz			
Maximum power input	kW	3	4	5	8	8	11	11	13	13
Maximum input current	A	14	21	26	16	16	19	19	21	21
Weight										
Shipping weight	kg	117	119	170	188	188	276	276	285	285

Dimensiones



		0106	0109	0112	0115	0118	0121	0123	0125	0127
L	mm	1105	1105	1105	1105	1105	1610	1610	1610	1610
P	mm	490	490	490	490	490	710	710	710	710
H	mm	870	870	1440	1440	1440	1270	1270	1270	1270

Main Accessories Available


NAME	DESCRIPTION	MODELS	
		0106 / 0118	0121 / 0127
FACTORY-FITTED ACCESSORIES			
CM	Modbus connectivity ready	■	●
KA	Heat exchanger + base frame heater	●	●
KA3	Base frame heater	●	●
RP	Battery protection grids	●	●
ACCESSORIES SUPPLIED SEPARATELY			
AG	Antivibration Kit	●	●
e-LITE	Multifunctional touch screen remote control	●	■
i-CR2	Wall-mounted remote control	■	●
Hi-TV415	Remote Display Touch Screen	●	●
FD	Defangator filter	●	●
FY	Y-Filter	●	●
Gi3	Hardware expansion module	●	●
EXOGEL	Anti-freeze thermal discharge valve	●	
RP	Battery protection grids (for field mounting)	●	●
SAS	System remote probe - Domestic hot water storage probe	●	●
TR2	Cu/Al battery with anti-corrosion treatment	●	●
VDIS2	Three-way diverter valve - Kvs 19,2	●	
VDIS3	Three-way diverter valve - Kvs 20,8		●

●: available

■: supplied as standard

* PERFORMANCE REFERRING TO THE FOLLOWING CONDITIONS:

- Cooling: outdoor air temperature 35°C; in/out water temperature 12/7°C.
- Cooling: outdoor air temperature 35°C; in/out water temperature 23/18°C.
- Heating: outdoor air temperature 7°C db 6°C db; in/out water temperature 30/35°C.
- Heating: outdoor air temperature 7°C db 6°C db; in/out water temperature 47/55°C.
- Cooling: low temperature, variable output, fixed flow rate.
- Heating: average climatic conditions; T_{biv}=-7°C; low temperature, variable output, fixed flow rate.
- Indicative data subject to changes. For the correct value, always refer to the technical label on the unit.
- Calculated for a decrease in system water temperature of 10°C with a defrost cycle lasting 6 minutes.
- Sound power: heating mode according to EN 12102:2022; value determined on the basis of measurements made in accordance with UNI EN ISO 9614-1, in compliance with Eurovent certification requirements.
- Sound pressure: value calculated from the sound power level using the standard ISO 3744:2010 at a distance of 1 m.
- Heating: outdoor air temperature 7°C db 6°C db; in/out water temperature 55/65°C.

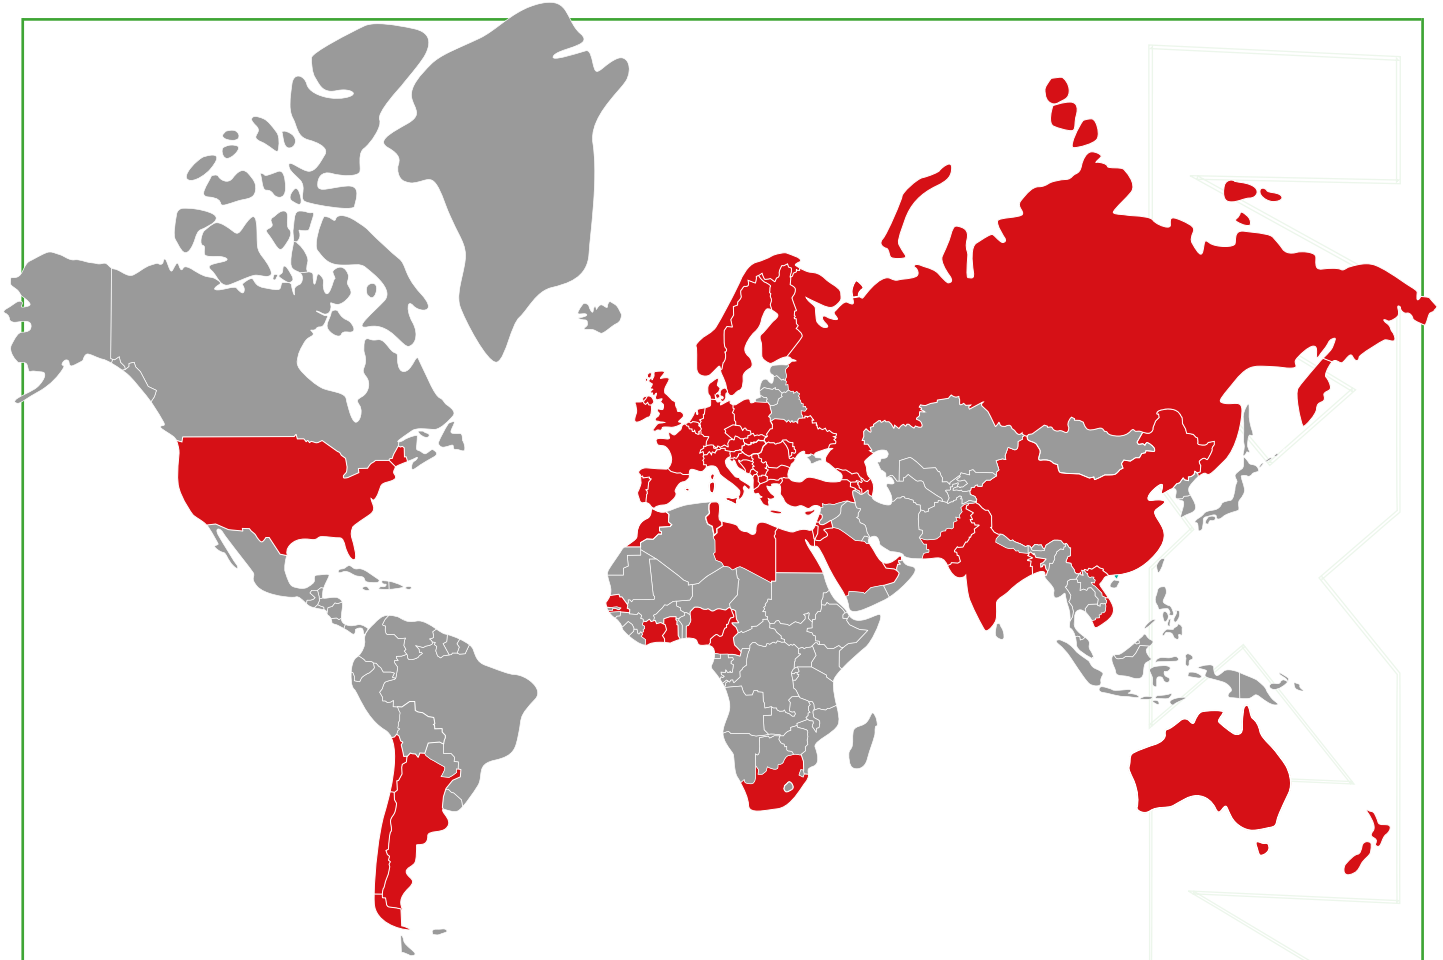

Years of Activity **30+**

MQ Establishment **10.520**

Employees **230**

Countries Served **40**

Department Research and Development **25**

Maxa Australia
1600D Canterbury Rd (via Moxon Road), Punchbowl, NSW 2196
Phone: 1300 765 339
info@maxaau.com.au - www.maxadistribution.com.au

